

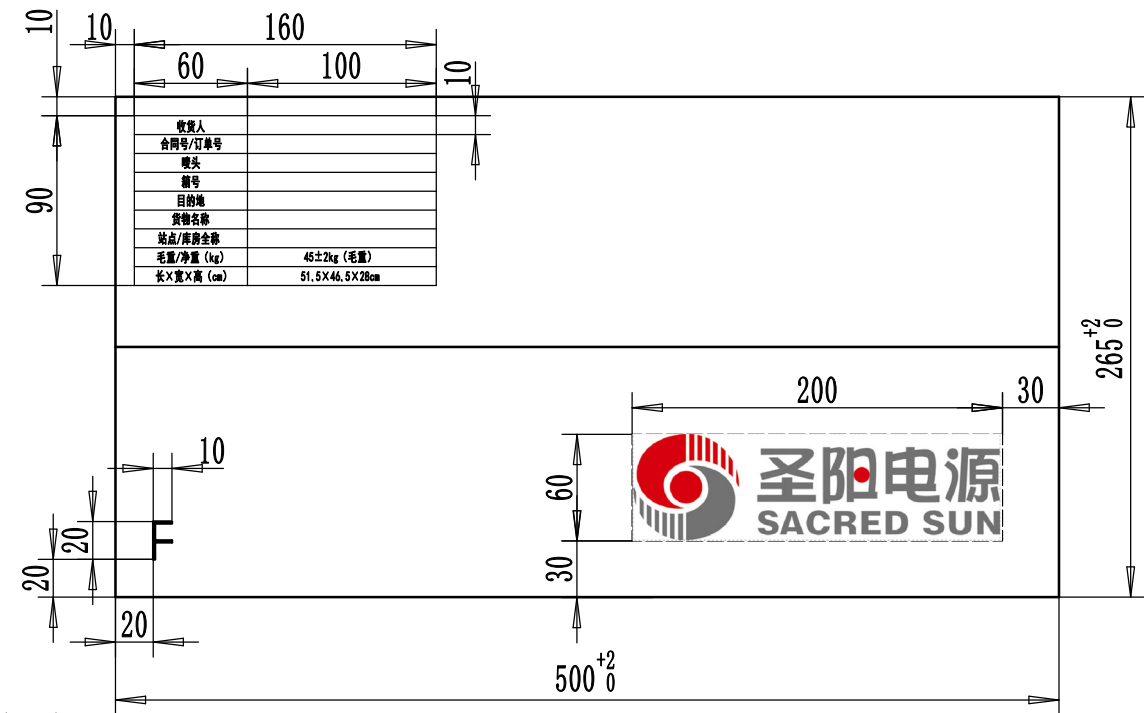


7922200010

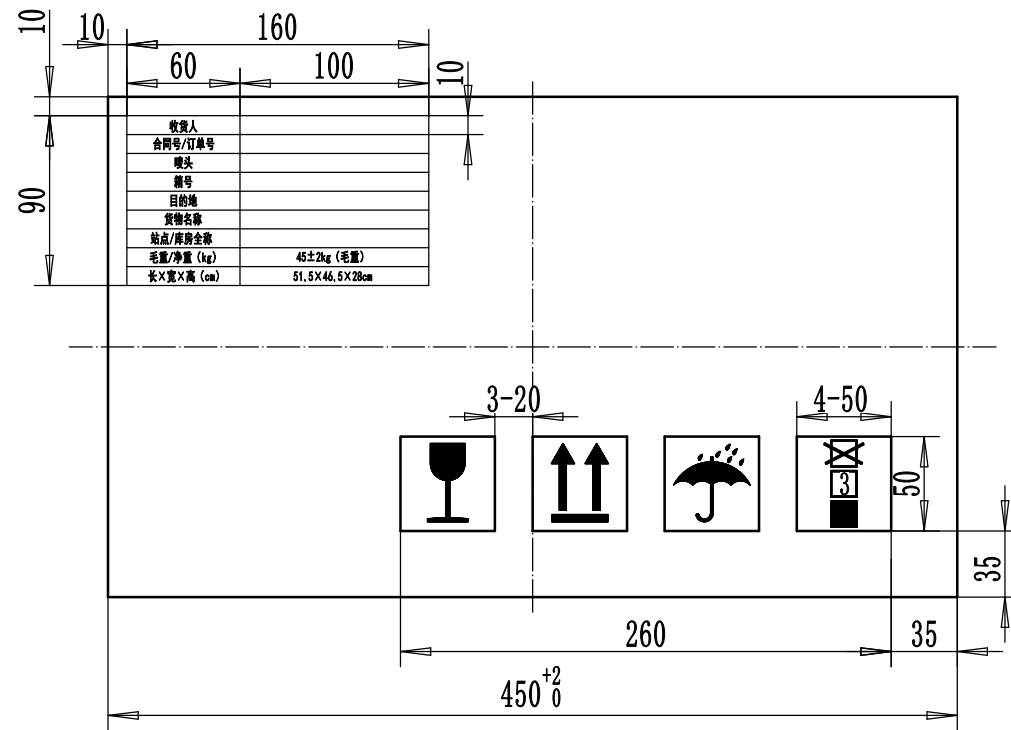

技术要求: Technical requirements:

1. 所标尺寸为纸箱的内壁尺寸; The dimensions superscript mark as the inner carton size;
2. 纸箱板厚6.5mm, 公差±0.5mm, 纸箱材料: 内壁(里纸)及外壁(面纸)为美卡环保纸, 定量≥170g/m²; 中间两层瓦楞纸, B型瓦楞定量≥110g/m², C型瓦楞定量≥125g/m², B型瓦楞居于纸板外侧, C型瓦楞居于纸板内侧, 瓦楞形状为UV型, 一层草纸板芯纸, 定量≥110g/m²; 纸箱颜色: 正常牛皮色。纸箱装订时采用双排铜钉, 间隔60mm;
The thickness of the carton board is 6.5mm, and the tolerance is ±0.5mm. The carton material: the inner wall (inner paper) and the outer wall (face paper) are Meika environmental protection paper, the basis weight is ≥170g/m²; the middle two layers of corrugated paper, the B type corrugated paper, the basis weight is ≥110g/m², C-type corrugated quantitative ≥125g/m², B-type corrugated on the outside of the cardboard, C-type corrugated on the inside of the cardboard, corrugated shape is UV type, a layer of straw cardboard core paper, quantitative ≥110g/m²; carton color: normal cowhide color. Double rows of copper nails are used for carton binding, with an interval of 60mm;
3. 符合标准: GB/T 6543-2008; Standard: GB/T 6543-2008;
4. 印刷清晰, 无飞边, 跑墨现象。字体均为黑体字。所有字体、图案颜色均为黑色, 内容按图纸标注的尺寸及位置双面印刷, “F”标识只印刷一面;
Print clearly, no casting fin, missing ink. Typefaces are the boldface type. All typefaces, the design color are the black color, and the content must be print as the dimension & location in drawing and double-side, “F” logo printed on one side only;



旧底图总号	
底图总号	
日期	签字

					48V100Ah-5U 中文纸箱-深380-侧开 Carton		0100077762		
标记 Sign	处数 Qty	更改文件号 File Number	签名 Signature	日期 Date	阶段标记 MPS	重量 Weight	比例 Scale		
设计 Designed	标准化 Standardized				S		1:4		
校对 Collated	审核 Checked				页码 Page	1	总页数 Total	1	
工艺 Technic	批准 Approved				山东圣阳电源股份有限公司 SHANDONG SACRED SUN POWER SOURCES CO.,LTD				